

ALTERNATING TIME RELAY

FTR-07


TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
Operating Voltage	150-260VAC
Operating Frequency	50 / 60 Hz
Operating Power	<5VA
Operating Temperature	-20°C.....55°C
Weight	<125Gr
Working Time	0.1 seconds – 100 min
Waiting Time	0.1 seconds – 100 min
Display	3 LEDS
Contact	1NO+1NO; 5A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Max2.5mm²
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter


VTEKE®
www.vteke.com.tr



CONNECTION DIAGRAM

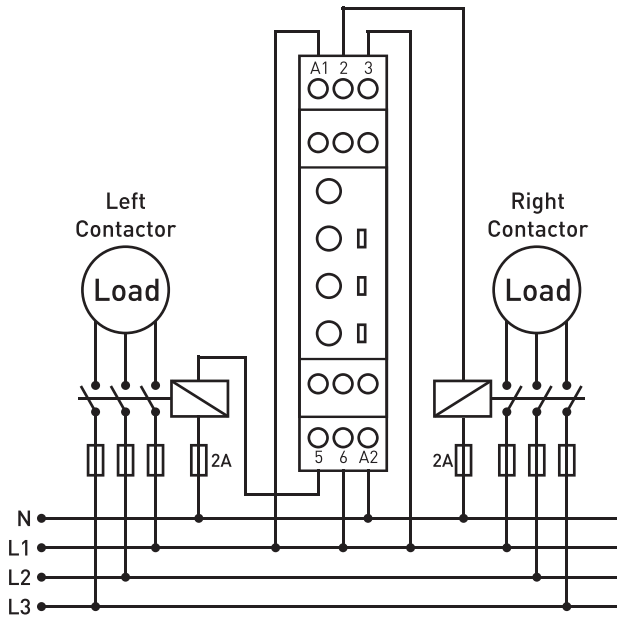

DIMENSIONS

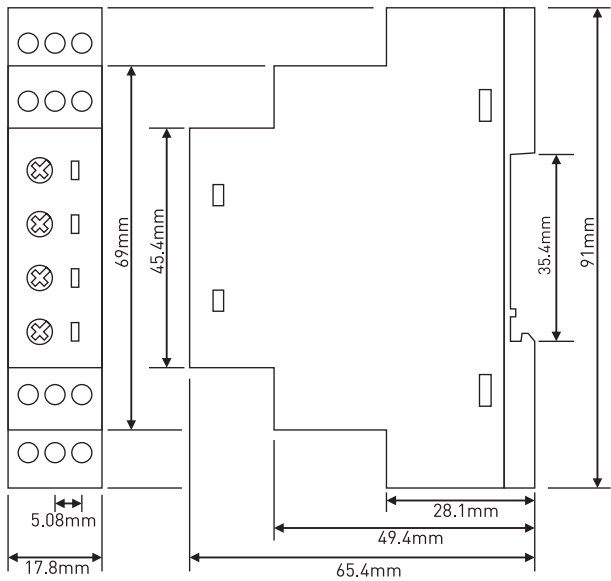

Left Contact	ton	toff	ton	toff	ton	toff	ton	toff
Waiting Time	ton	toff	ton	toff	ton	toff	ton	toff
Right Contact	ton	toff	ton	toff	ton	toff	ton	toff
U (Supply)	ton	toff	ton	toff	ton	toff	ton	toff